

# NORTH MAIN STREET BYPASS (LAWRENCE WAY)

**PROPONENT:**  
**WALNUT CREEK**


**PROJECT NO:**  
**1103**

**DESCRIPTION:**

The North Main Street Bypass (Lawrence Way) provided a new one-way roadway from Pine Street to the northbound I-680 on-ramp. The roadway consists of two lanes from Pine Street to just north of Parkside Drive where an on-ramp from Parkside Drive enters, creating a three lane road to the end of the project. The roadway includes a 180-foot-long structure over Parkside Drive with retaining walls on both sides. Parkside Drive has been widened between North Main Street and the Bypass and a new signal has been constructed at the entrance to the Bypass on-ramp. Two existing signals have been modified on North Main Street and North Main Street has been reconfigured between California Boulevard and I-680 from its original three lanes in each direction to four southbound and two northbound lanes by shifting the median and restriping.

**STATUS:**

Construction completed in 1996.

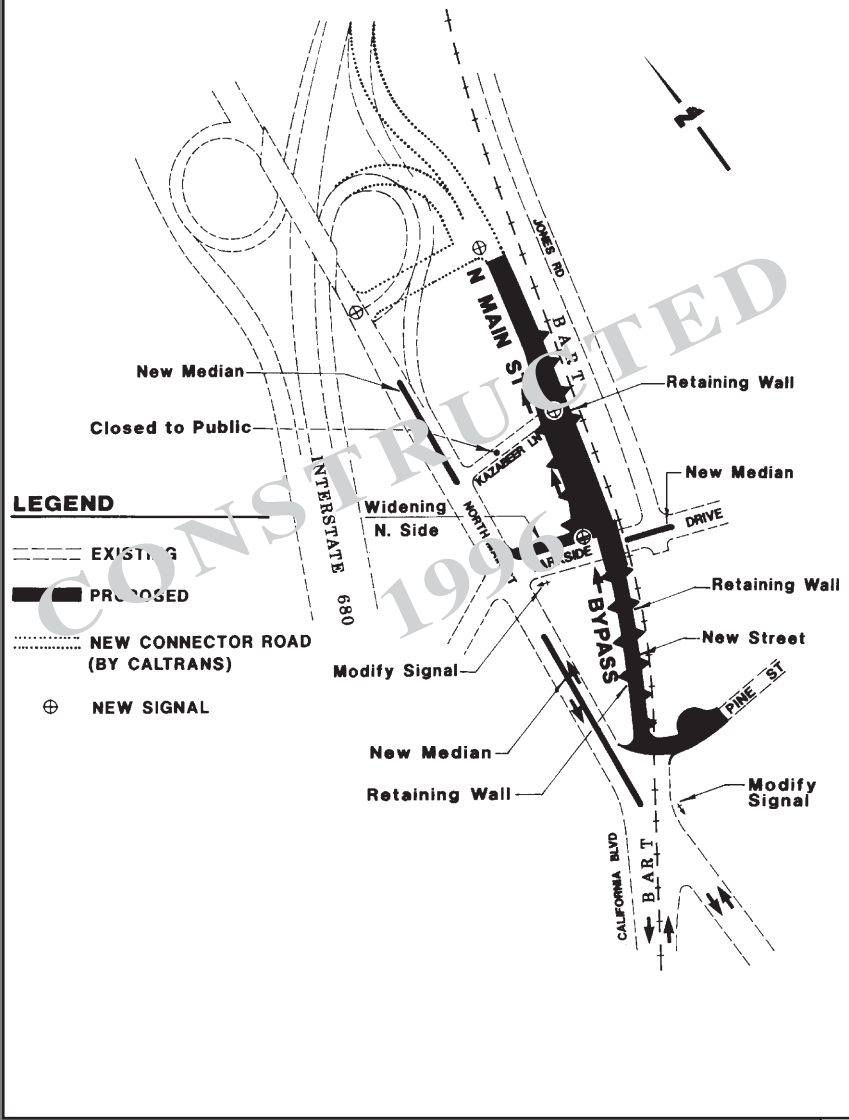

FUNDING SOURCES	(\$ X 1000):
Local	2,768.4
Measure C (Esc.\$) <sup>1</sup>	8,520.0
<b>TOTAL</b>	<b>\$11,288.4</b>

<sup>1</sup> Measure C funds shown in escalated dollars. Actual commitment is in 1988 dollars as shown in Appendix A.